


CODIGO

2018R-XX

DESCRIPCION

Receptor a cable 2.54mm de XX vias

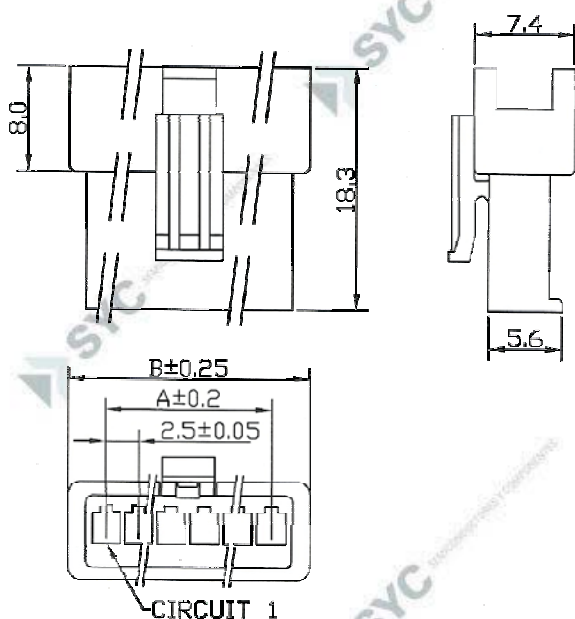

SPECIFICATION:

PITCH BETWEEN POLES : 2.5mm

CURRENT RATING : 3A AC/DC

VOLTAGE RATING : 250V AC/DC

CONTACT RESISTANCE : 20mΩ (max.)

INSULATION RESISTANCE : 1,000MΩ MIN

WITHSTAND VOLTAGE : 800V AC/MINUTE

TEMPERATURE RANGE : -25°C TO 185°C

FEATURES:

AVAILABLE NUMBER OF CIRCUITS : 2 TO 12

MATERIAL : NYLON 66 UL 94V-0

ACCEPTTS : 2018TP CRIMP TERMINAL

MATES WITH 2018P SERIES HOUSING

Dimensional and Order Information

Poles	Part No	DIM:(mm)			
		A	B	C	D
2	2018R-02	2.50	8.10	5.70	10.00
3	2018R-03	5.00	10.60	8.20	12.50
4	2018R-04	7.50	13.10	10.70	15.00
5	2018R-05	10.00	15.60	13.20	17.50
6	2018R-06	12.50	18.10	15.70	20.00
7	2018R-07	15.00	20.60	18.20	22.50
8	2018R-08	17.50	23.10	20.70	25.00
9	2018R-09	20.00	25.60	23.20	27.50
10	2018R-10	22.50	28.10	25.70	30.00
11	2018R-11	25.00	30.60	28.20	32.50
12	2018R-12	27.50	33.10	30.70	35.00