


**CODIGO**


2323S-XXA

**DESCRIPCION**

Borde de impreso flexible de X vias

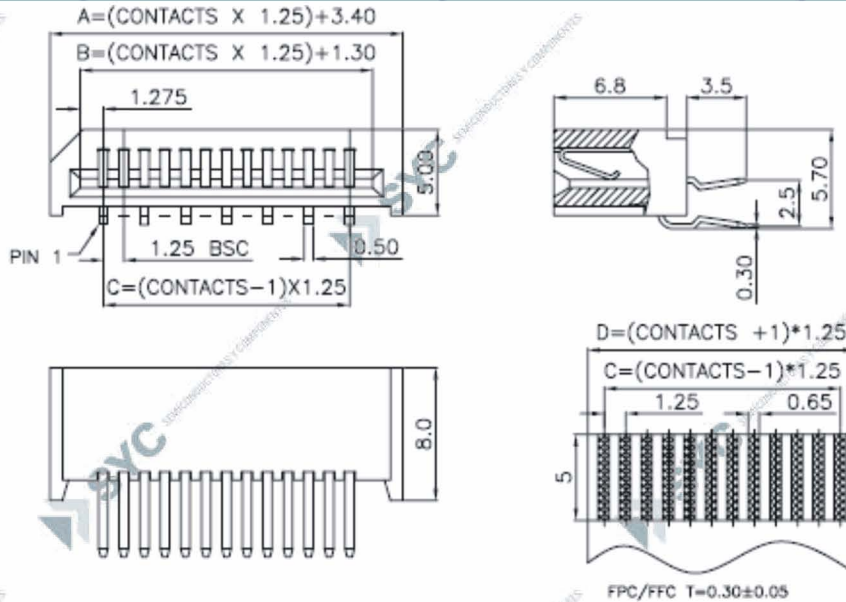

Pin	Dim A	Dim B	Dim C	Dim D	Pin	Dim A	Dim B	Dim C	Dim D
3	7.15	5.05	2.50	3.25	17	24.65	22.55	20.00	20.75
4	8.40	6.30	3.75	4.50	18	25.90	23.80	21.25	22.00
5	9.65	7.55	5.00	5.75	19	27.15	25.05	22.50	23.25
6	10.90	8.80	6.25	7.00	20	28.40	26.30	23.75	24.50
7	12.15	10.05	7.50	8.25	21	29.65	27.55	25.00	25.75
8	13.40	11.30	8.75	9.50	22	30.90	28.80	26.25	27.00
9	14.65	12.55	10.00	10.75	23	32.15	30.05	27.50	28.25
10	15.90	13.80	11.25	12.00	24	33.40	31.30	28.75	29.50
11	17.15	15.05	12.50	13.25	25	34.65	32.55	30.00	30.75
12	18.40	16.30	13.75	14.50	26	35.90	33.80	31.25	32.00
13	19.65	17.55	15.00	15.75	27	37.15	35.05	32.50	33.25
14	20.90	18.80	16.25	17.00	28	38.40	36.30	33.75	34.50
15	22.15	20.05	17.50	18.25	29	39.65	37.55	35.00	35.75
16	23.40	21.30	18.75	19.50	30	40.90	38.80	36.25	37.00



**Specifications:**

Current Rating:1.0A AC/DC  
 Voltage Rating:200V AC/DC  
 Contact Resistance:20m ohm. max.  
 Insulation Resistance:500M ohm. min.  
 Withstanding Voltage:500V AC For One Minute  
 Operating Temperature Range:-25°C ~ +85°C


**Material and Finish**

Insulator:High Temp. Plastic(UL94V-0)  
 Contact:Phosphor Bronze  
 Plating:Tin Plated

**How To Order**

2323S-XXA

- A: Standard Type
- No. Of Positions
- S: Straight Type
- Series No.

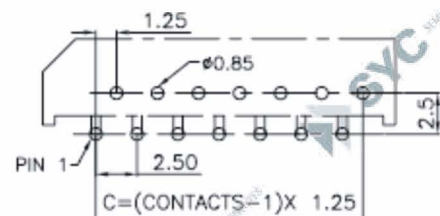

Recommended P.C.Board Layout(STD)