
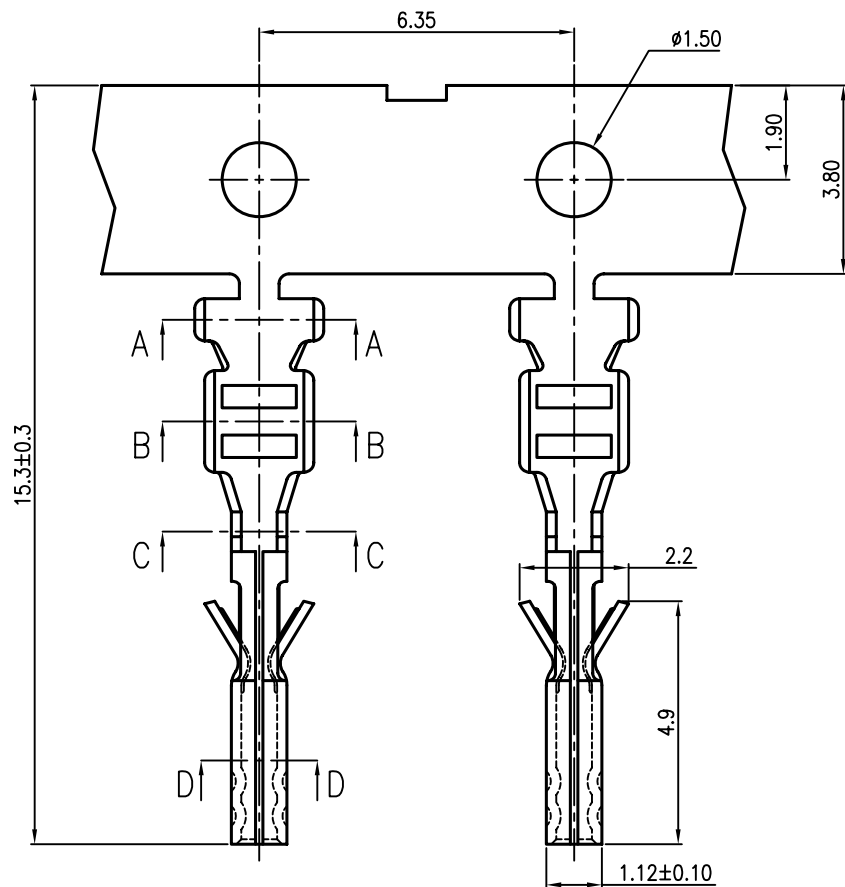






Specifications:

Current Rating: 5.0A AC/DC #22AWG
 Voltage Rating: 250V AC/DC
 Contact Resistance: 10m ohm. max.
 Withstanding Voltage: 1,500V AC/minute
 Operating Temperature Range: -25°C ~ +85°C
 Application Wires: AWG #20 to #24
 Insulation O.D.: Ø1.85mm max.
 Mates With 5560 Series Housing
 Material and Finish
 Contact: Phosphor Bronze
 Finish: Tin Plated



Part No.	M
5560T A	0.54

RoHS Compliant

5560-TA

TERMINAL HEMBRA P/5560 6-24V

www.sycelectronica.com.ar

GENERAL TOLERANCE:
 .X=±0.2
 .XX=±0.15

UNIT: MM
 SCALE: 1:1
 SHEET: 1/1
 PROJECTION:



DESCRIPTION:
 3.0mm Wire to Board Terminal

PART NO:

SIZE

A4