

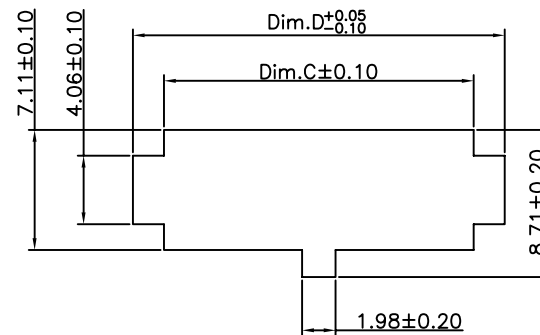




P/N: 5561T-LF

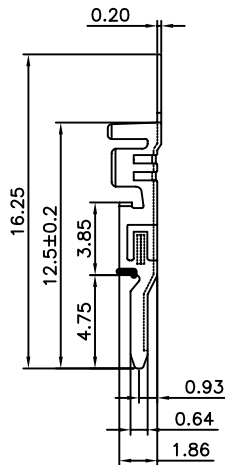

RECOMMENDED PANEL CUT-OUT



Specifications:

Current Rating:5.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:10m ohm. Max.

Insulation Resistance:1,000M ohm. Min.

Withstanding Voltage:1,500V AC For One Minute

Operating Temperature Range:-25°C To +105°C

Material and Finish

Material:High Temp. Plastic(UL94V-0)

Contact:Phosphor Bronze





Plating:Tin Plated

Application Wire:Awg#24~#20

How to Order:

5561-XX

No.of Contacts

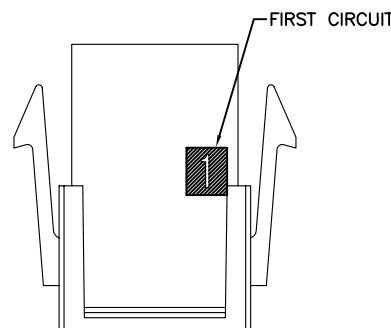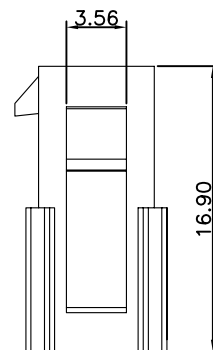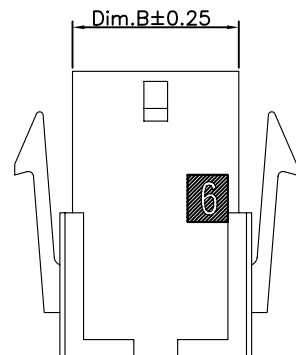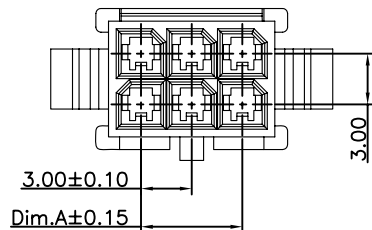

Dimension Information:

Circuits	Dim.A	Dim.B	Dim.C	Dim.D
2		3.85	4.21	7.90
4	3.00	6.85	7.21	10.90
6	6.00	9.85	10.21	13.89
8	9.00	12.85	13.21	16.89
10	12.00	15.85	16.21	19.89
12	15.00	18.85	19.21	22.89
14	18.00	21.82	22.21	25.88
16	21.00	24.85	25.21	28.88
18	24.00	27.85	28.21	31.88
20	27.00	30.85	31.21	34.87
22	30.00	33.85	34.21	37.87
24	33.00	36.85	37.21	40.87

RoHS Compliant

GENERAL TOLERANCE:

.X=±0.2


.XX=±0.15

UNIT: MM

SCALE:1:1

SHEET: 1 / 2

PROJECTION:



DESCRIPTION:

3.0mm Power Plug Housing

PART NO:

5561-XX

SIZE

A4


1

2


3

4


5




2PIN

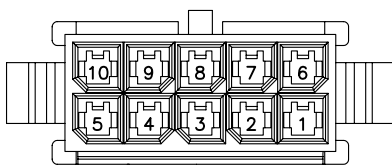


10PIN

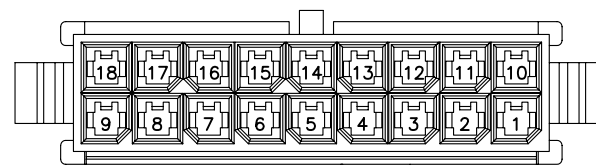


18PIN




4PIN

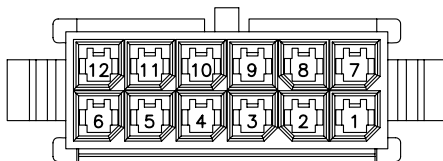


12PIN

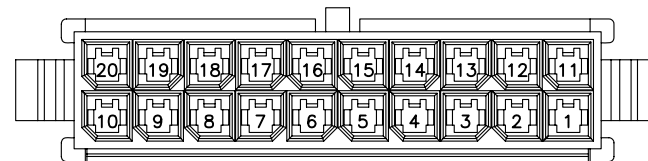


20PIN

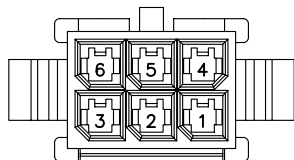


6PIN

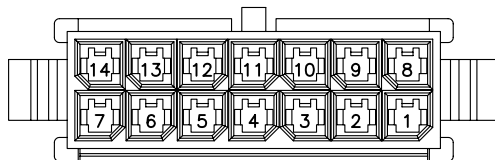


14PIN

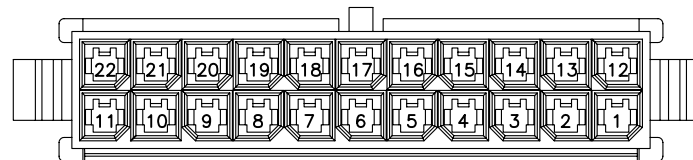


22PIN

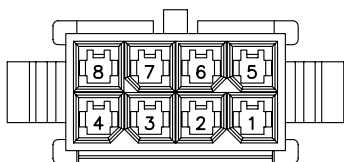

8PIN

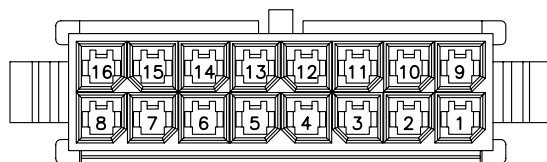

16PIN

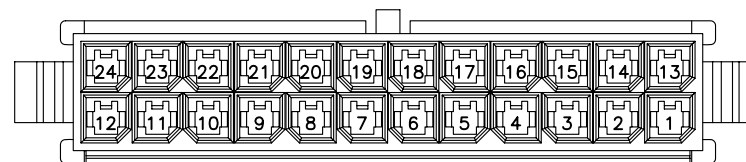

24PIN

2~24PIN防呆圖

RoHS Compliant

GENERAL TOLERANCE:

.X=±0.20

.XX=±0.15

UNIT: MM

SCALE: 1:1

SHEET: 2 / 2

PROJECTION:

DESCRIPTION:

3.0mm Power Plug Housing

PART NO:

5561-XX

SIZE

A4

A

B

C

D