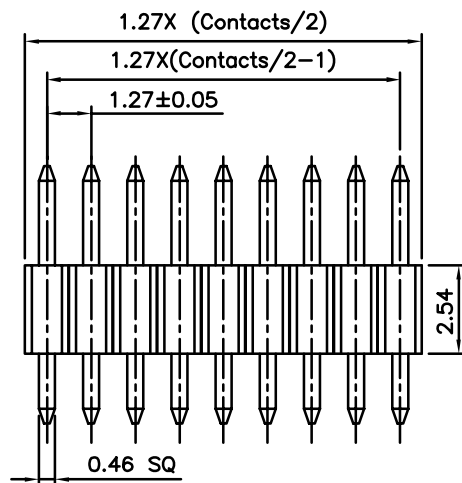
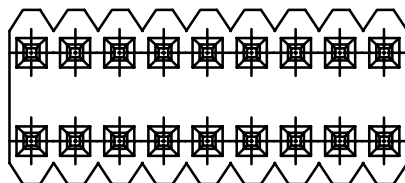


P.C.B. Layout

Specifications:

Current rating:1.0A AC,DC

Voltage rating:50V AC,DC

Contact resistance:20m Ohm max

Insulation resistance:500M Ohm min

Withstanding voltage:500V AC/minute

Temperature range:-25°C to +125°C

Material:

Insulator:High Temperature Material(UL94V-0)

Contact material:Copper Alloy

Plating:Gold Plated

RoHS Compliant

GENERAL TOLERANCE:


.X=±0.2

.XX=±0.15

UNIT: MM

SCALE:

SHEET: 1 / 1

PROJECTION: 

MACHO .05"X.1" 40 V RECTO

DESCRIPTION:

1.27MM PIN HEADER DOUBLE ROWS

PART NO:

PLD40-1.27MM

SIZE

A4