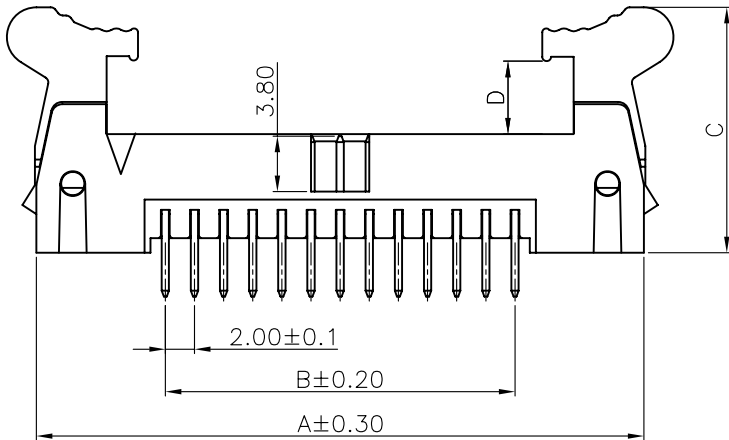



Specifications:

Current Rating:2.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:1000M ohm. Min.

Withstanding Voltage:500V AC For One Minute

Operating Temperature Range:-40°C To +105°C

Materials:

Insulator:High Temp. Plastic(Nylon6T UL94V-0)

Insulator Color:Black

Contact:Copper Alloy


Plating:Gold Plated

Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
10	25.70	8.00	30	45.70	28.00
12	27.70	10.00	34	49.70	32.00
14	29.70	12.00	40	55.70	38.00
16	31.70	14.00	44	59.70	42.00
20	35.70	18.00	50	65.70	48.00
22	37.70	20.00	60	75.70	58.00
24	39.70	22.00	68	83.70	66.00
26	41.70	24.00			

Dimension:

Part No	Dim.C	Dim.D
2017S-XXG	16.85	5.0
2017S-XXG-02	20.05	8.2

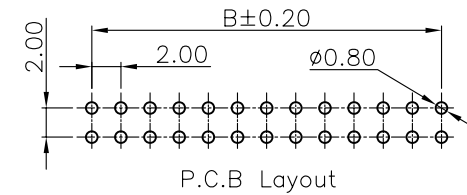

RoHS Compliant

GENERAL TOLERANCE:

.X=±0.20

.XX=±0.15

UNIT: MM

SCALE: 1:1

SHEET: 1 / 1

PROJECTION:



DESCRIPTION:

2.0mm Shrouder Header
Straight Ejctor Type

PART NO:

SCMXXS-2MM

SIZE

A4