


CODIGO	DESCRIPCION
LLAV-MICROE-58P	LLAVE (ON)-OFF-(ON) SPDT 3A 3P

### Specification:






1. Rating: 6A 125VAC;3A 250VAC
2. Contact Resistance: 20mΩ max.
3. Insulation Resistance: 500VDC 1000mΩ min.
4. Dielectric Strength: 1500VAC 1Minute
5. Operating Temperature: -55°C~+85°C
6. Electrical Life: 20,000 Cycles

### Solder terminal(1)

### Handle Standard(A)



### Nameplate

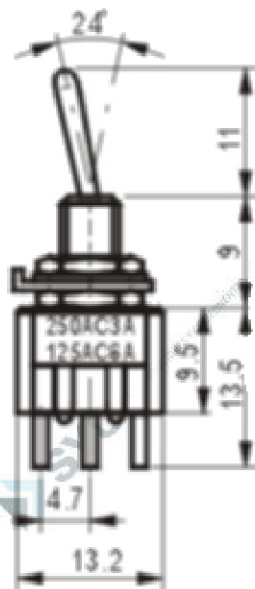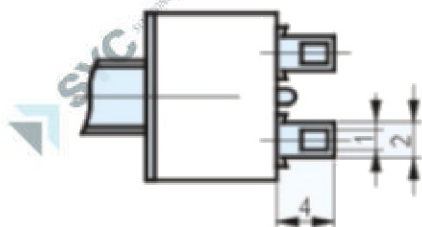

unit:mm