


CODIGO

1201-XXM

DESCRIPCION

Minidin X vias hembra p/circuito impreso a 90°

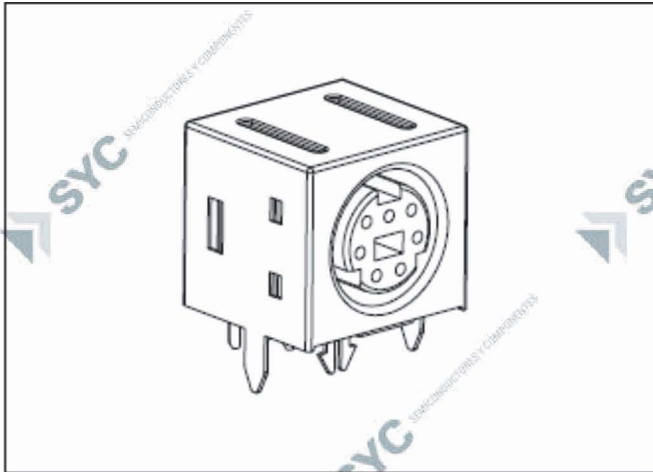


Specifications

Current rating:1.0AAC/DC
Voltage rating:12V AC/DC
Contact resistance:20m ohm. max.
Insulation resistance:100M ohm. Min.
Withstanding voltage:250V AC for one minute
Operating temperature range:-40°C to +105°C

Material and Finish

Insulator:High Temp. Plastic(UL94V-0)
Contact:Phosphor Bronze
Plating:Selective Gold Plated

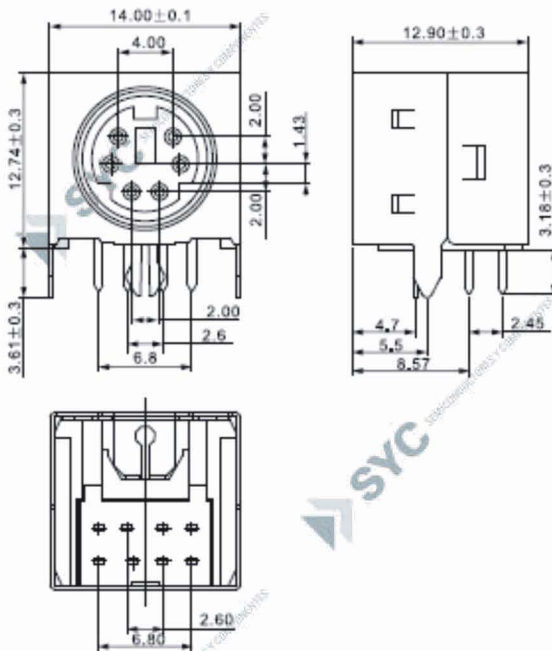

Ordering Information

1201—XX—5M
① ②

① No. of Contacts
3/4/5/6/7/8
Ways

② Blank:All Plastic
5M:Full Shielding

ARRANGMENT OF CONTACT			
NO. OF CONTACT	3	4	5
PRODUCT NO.	1201-03-5M	1201-04-5M	1201-05-5M
P.C.B.LAYOUT (BOTTOM VIEW)			

ARRANGMENT OF CONTACT			
NO. OF CONTACT	6	7	8
PRODUCT NO.	1201-06-5M	1201-07-5M	1201-08-5M
P.C.B.LAYOUT (BOTTOM VIEW)			