
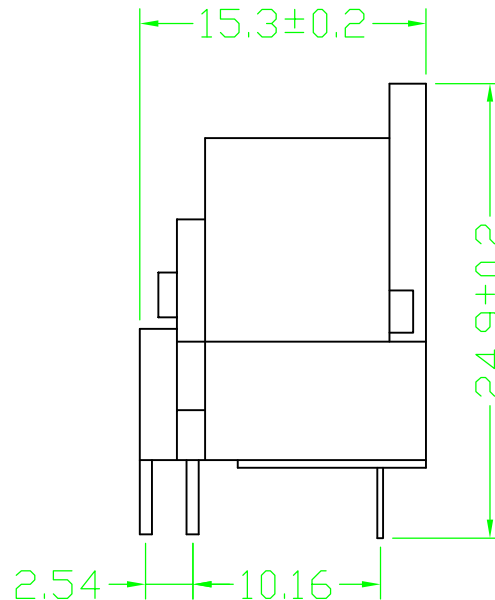


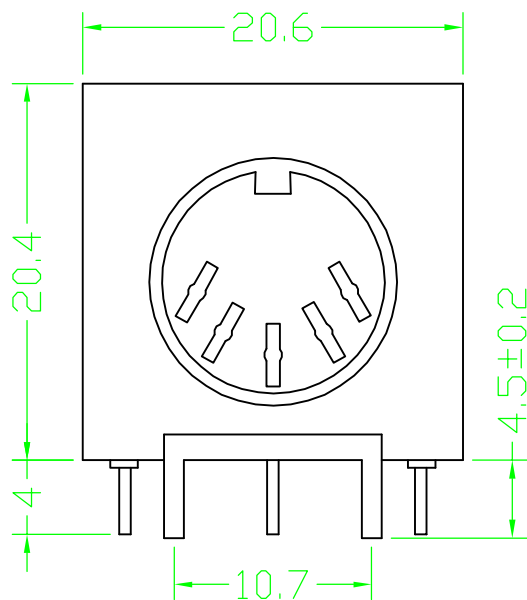

Specification:

Contact resistance: 30mΩ max

Insulator Resistance: 1000MΩ min.at DC 500V

Rated current : 1 AMP


Rated Voltage: 30V AC

Dielectric Withstanding :

Contact: Phosphor Bronze

Voltage: AC 500V For 1minute

Housing: PBT+30 % Glass Fiber (UL 94V-0)

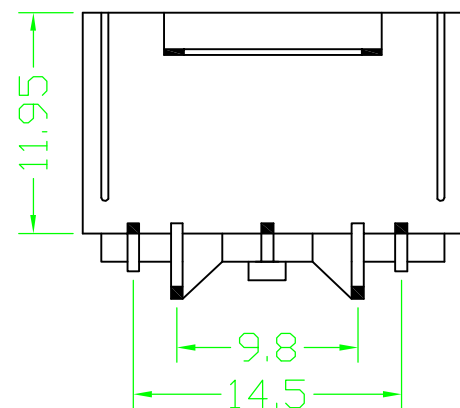

1202-05

DIN 5 VIAS HEMBRA P/CI 90*