

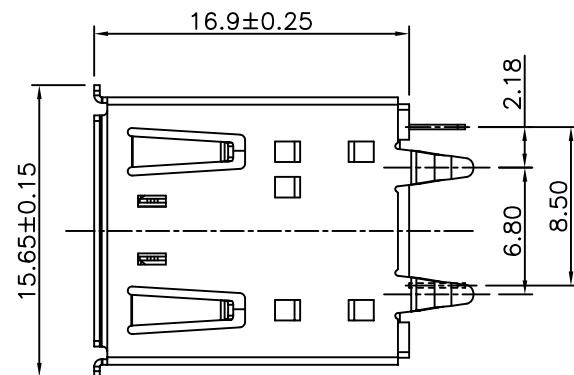



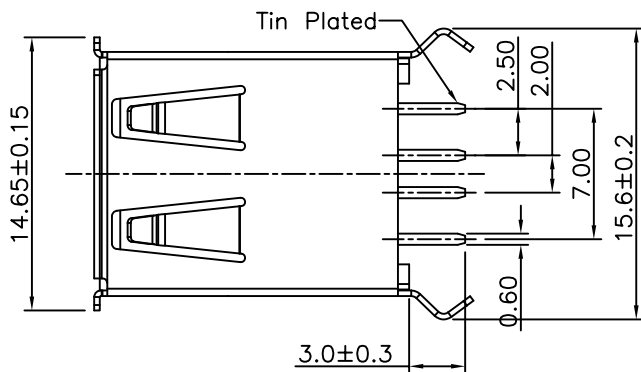


5075AS-04-2

CONECTOR USB A P/PCB REC. DOBLE

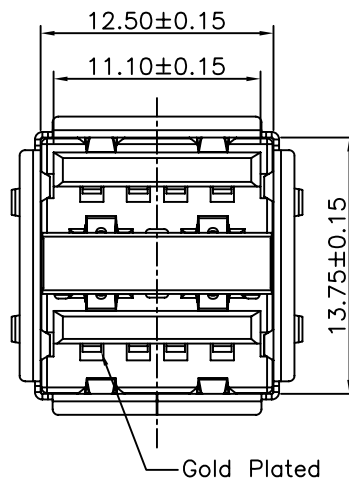

Specifications:
 Current rating:1.0A AC/DC
 Voltage rating:30V AC/DC
 Contact resistance:20m ohm. max.
 Insulation resistance:1000M ohm. Min.
 Withstanding voltage:750V AC for one minute
 Operating temperature range:-40°C to +105°C
 Material and Finish:
 Insulator:High Temp Plastic (UL94V-0)
 Contact:Copper Alloy
 Plating:Gold Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell:Copper Alloy,Nickel Plated

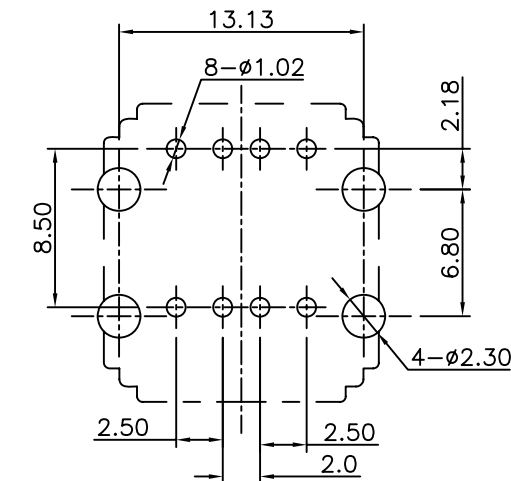

PCB Layout(PCB Thickness:1.60MM)

RoHS Compliant

GENERAL TOLERANCE:

.X=±0.20

.XX=±0.15

UNIT: MM

SCALE:

SHEET: 1 / 1

PROJECTION:

DESCRIPTION:

DUAL USB-A Female Straight Type

SIZE

A4