








1

2

3

4

5

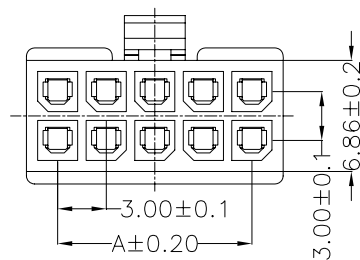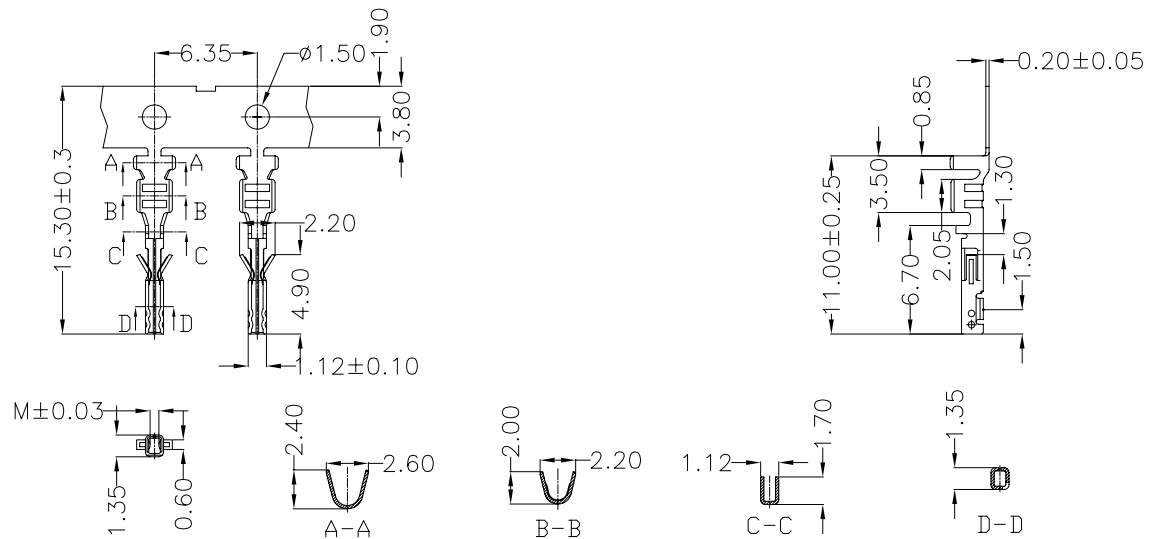

Specifications:
 Current Rating:5.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:10m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:1.500V AC/Minute
 Operating Temperature Range:-25°C~+105°C
 Material and Finish
 Insulator:Nylon66 (UL94V-0)
 Insulator Color: Black
 Contact:Phosphor Bronze
 Plating:Tin Plated
 Mating With:5560T terminal
 How To Order
 5560-XX

No.of Positions

Poles	Dimension		PCS/BAG	Poles	Dimension		PCS/BAG
	A	B			A	B	
02	—	3.85	1,000	14	18.00	21.85	1,000
04	3.00	6.85	1,000	16	21.00	24.85	1,000
06	6.00	9.85	1,000	18	24.00	27.85	1,000
08	9.00	12.85	1,000	20	27.00	30.85	500
10	12.00	15.85	1,000	22	30.00	33.85	500
12	15.00	18.85	1,000	24	33.00	36.85	500

RoHS Compliant

GENERAL TOLERANCE:

.X=±0.20

.XX=±0.15

UNIT: MM

SCALE:1:1

SHEET: 1 / 2

PROJECTION:



DESCRIPTION:

3.0mm Power Plug Housing

PART NO:

5560-XX

SIZE

A4

1

2

3

4

5

2Pin

4Pin

6Pin

















8Pin

10Pin

12Pin

14Pin

16Pin











18Pin

20Pin

22Pin

24Pin

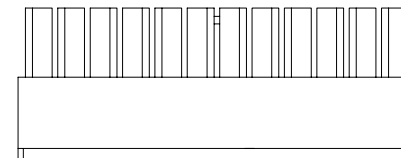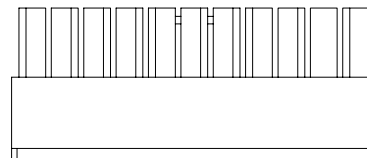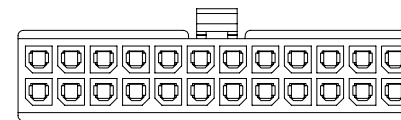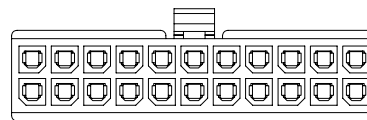

A

B

C

D

RoHS Compliant

GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 3.0mm Power Pulg Housing Protection key Drawing	SIZE A4
UNIT: MM	PART NO:		
SCALE:1:1	5560-XX		
SHEET: 2/2			
PROJECTION:			