


Specifications:

- Current Rating: 5.0A AC/DC
- Voltage Rating: 250V AC/DC
- Contact Resistance: 10m ohm. Max.
- Insulation Resistance: 1000M ohm. Min.
- Withstanding Voltage: AC 1500V AC/minute
- Operating Temperature Range: -25°C ~ +105°C
- Material and Finish
- Insulator: High Temp. Plastic (Nylon 46 UL94V-0)
- Insulator Color: Black
- Contact: Copper Alloy
- Finish: Tin Plated




How to Order

5561S-XX



Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
2	6.7	—	14	24.7	18.0
4	9.7	3.0	16	27.7	21.0
6	12.7	6.0	18	30.7	24.0
8	15.7	9.0	20	33.7	27.0
10	18.7	12.0	22	36.7	30.0
12	21.7	15.0	24	39.7	33.0

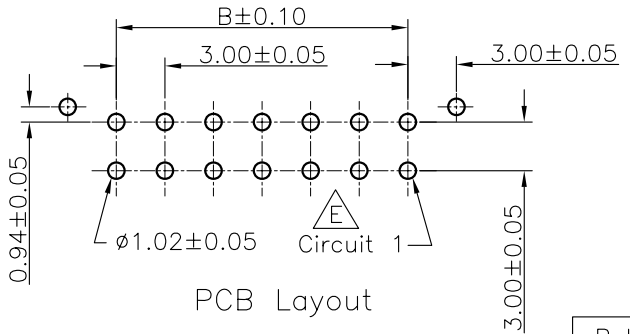

RoHS Compliant

GENERAL TOLERANCE: .X = ±0.2 .XX = ±0.15		SIZE A4
UNIT: MM	DESCRIPTION: 3.0mm Pitch Power Wafer Straight Type	
SCALE:	PART NO: 5561S-XX	
SHEET: 1 / 2		
PROJECTION:		




1

2


3

4


5




8PIN

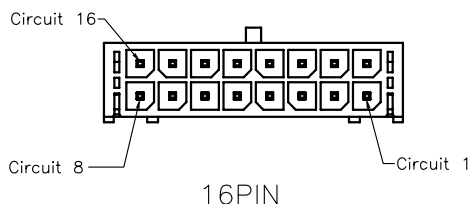


16PIN

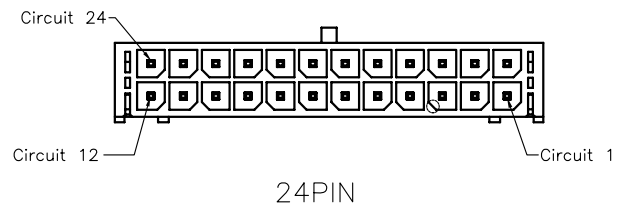


24PIN




6PIN

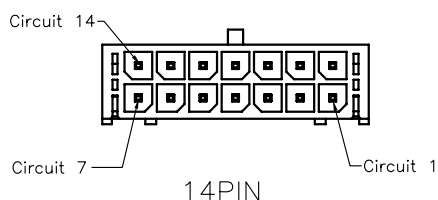


14PIN

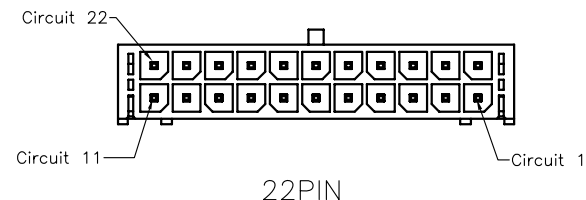


22PIN




4PIN

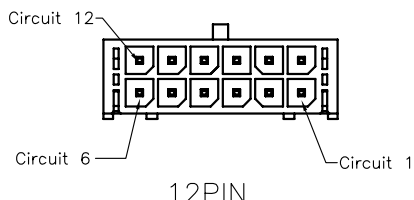


12PIN

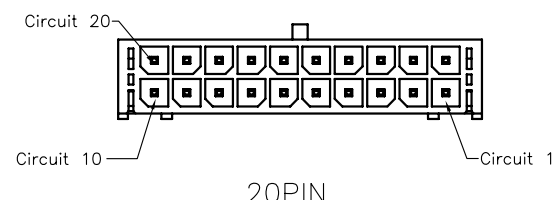


20PIN



2PIN

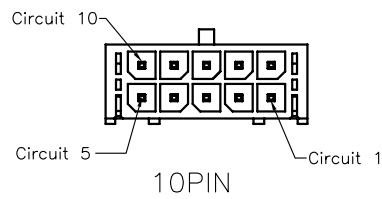

10PIN

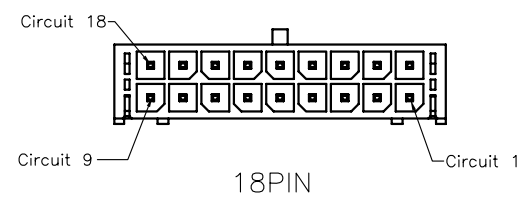

18PIN

2~24P Protection Key Drawing(Ref.)

GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 3.0mm Power Wafer Protection key Drawing	SIZE A4
UNIT: MM	PART NO: 5561S-XX		
SCALE:1:1			
SHEET: 2 / 2			
PROJECTION: 