

CODIGO	DESCRIPCION
LLAV-MICROE-46	Llave Simple Inversora 1A S/PUN.ME.RETE


### Specification

1. Rating: 3A 125VAC; 1.5A 250VAC
2. Contact Resistance: 20mΩ max.
3. Insulation Resistance: 500VDC 1000mΩ min.
4. Dielectric Strength: 1000VAC, 1Minute
5. Operating Temperature: -20°C~+65°C
6. Electrical Life: 20,000 Cycles


### Standard(A)





### Solder terminal(1)



### Standard( )



### ON-ON

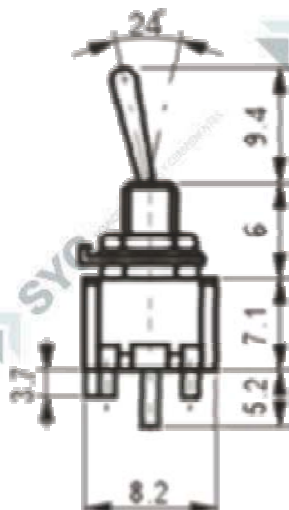

unit:mm