
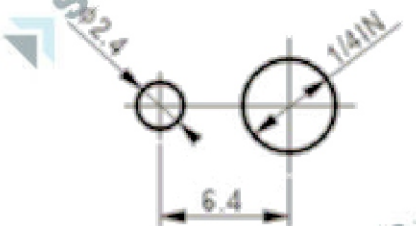
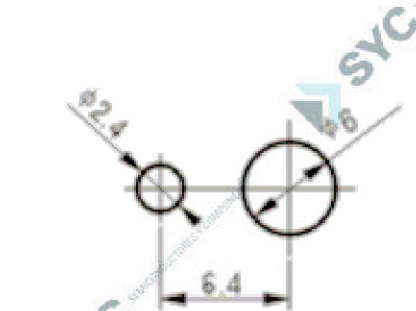


CODIGO	DESCRIPCION
LLAV-MICROE-78P	LLAVE (ON)-OFF-(ON) DPDT 3A 6P

Specification:

1. Rating: 6A 125VAC;3A 250VAC
2. Contact Resistance: 20mΩ max.
3. Insulation Resistance: 500VDC 1000mΩ min.
4. Dielectric Strength: 1500VAC 1Minute
5. Operating Temperature: -55°C~+85°C
6. Electrical Life: 20,000 Cycles




Solder terminal(1)

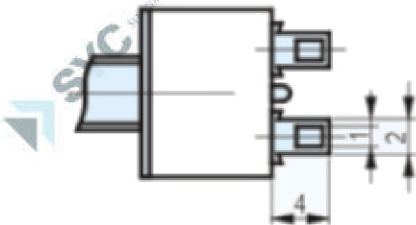

Handle Standard(A)



Nameplate

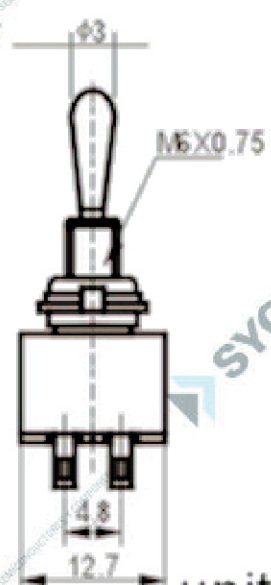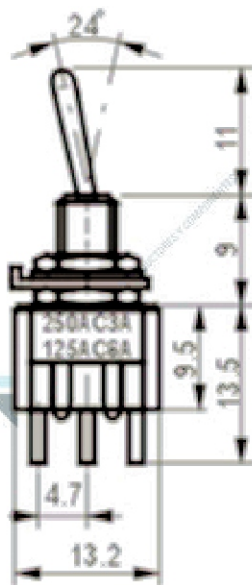

unit:mm