

CODIGO	DESCRIPCION
C1206-XX-NP0	Capacitor ceramico SMD NP0 50V

Application

NPO (COG) dielectric properties; suited for precision circuits, requiring stable dielectric characteristics:


- Negligible dependence of capacitance and dissipation factor on time, voltage, and frequency
- Low-loss (High Q)
- Predictable linear temperature coefficient
- No piezoelectric behavior

General Specification


- Operating temperature range : $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- Temperature coefficient: $0 \pm 30\text{ppm}/^{\circ}\text{C}$
- Capacitance Range: $0.5\text{pF} \sim 0.22\mu\text{F}$ (Test condition: $1.0 \pm 0.2\text{Vrms}$, 1KHz, for $\leq 1000\text{pF}$ use 1 MHz)
- Capacitance Tolerance: Preferred $\pm 1\%$, $\pm 2\%$, $\pm 5\%$, $\pm 10\%$. ($10\text{PF} <: \pm 0.05\text{pF}$, $\pm 0.1\text{pF}$, $\pm 0.25\text{pF}$, $\pm 0.5\text{pF}$)
- Rated Voltage: 25VDC, 50VDC, 100VDC, 250VDC, 500VDC, 1KVDC, 2KVDC, 3KVDC
- Q value : $C < 30\text{pF} : Q \geq 400+20C$, $C \geq 30\text{pF} : Q \geq 1000$ (Test condition: 1MHz, 1KHZ for $C \geq 1000\text{pF}$, 1Vrms, 25°C)
- Insulation resistance: $100,000\text{M}\Omega$ or $1,000\ \Omega\text{-F min}$, whichever is less. (rated voltage applied at 25°C)
- Dielectric strength: $> 250\%$ of rated voltage for $10 \sim 100\text{V}$, 200% for $200\&250\text{V}$, 150% for 500V , 120% for $\geq 1000\text{V}$

Characteristics


Capacitance change $\Delta C/C_{25}$ versus temperature T (tolerance range)

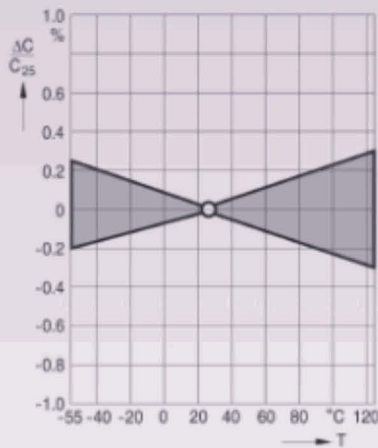


Capacitance change $\Delta C/C_0$ versus superimposed dc voltage V

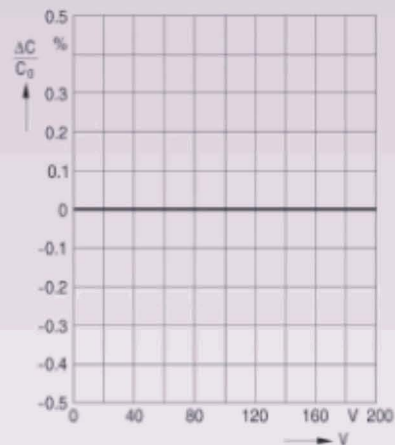

Insulation resistance R_{ins} versus Temperature T

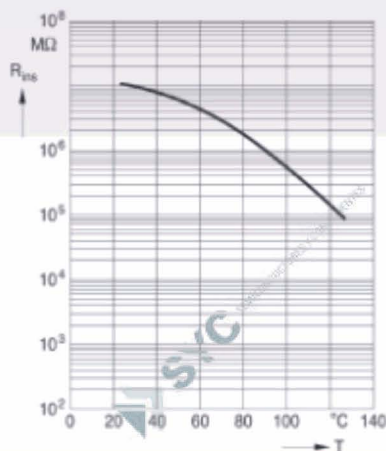

Capacitance change $\Delta C/C_1$ versus time (aging rate)

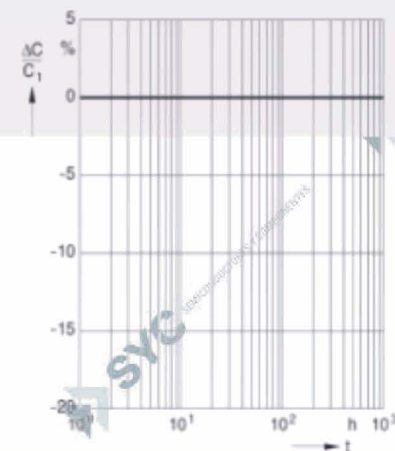

CODIGO

C1206-XX-NP0

DESCRIPCION

Capacitor ceramico SMD NP0 50V

Size And Values Available (NPO) 25v~100v

Size		0402		0603			0805			1206			1210		1812	
(L)Length	mm	1.00±0.05		1.60±0.10			2.00±0.20			3.20±0.20			3.20±0.30		4.50±0.30	
(W)Width	mm	0.50±0.05		0.80±0.10			1.25±0.20			1.60±0.20			2.50±0.20		3.20±0.30	
(T)Max. Thickness	mm	0.50±0.05		0.80±0.10			1.25±0.10			1.65±0.20			2.50±0.30		3.20±0.30	
(t)Terminal	mm	0.15±0.35		0.27~0.60			0.30~0.70			0.30~0.70			0.30~0.70		0.35~1.00	
Capacitance		25	50	25	50	100	25	50	100	25	50	100	50	100	50	100
0.47 - 0.82	pF		S		P	P		A	A			H	H			
1 - 9.1	pF		S		P	P		A	A			H	H			
10	pF		S		P	P		A	A			H	H			
12	pF		S		P	P		A	A			H	H			
15	pF		S		P	P		A	A			H	H			
18	pF		S		P	P		A	A			H	H			
22	pF		S		P	P		A	A			H	H			
27	pF		S		P	P		A	A			H	H			
33	pF		S		P	P		A	A			H	H			
39	pF		S		P	P		A	A			H	H			
47	pF		S		P	P		A	A			H	H			
56	pF		S		P	P		A	A			H	H			
68	pF		S		P	P		A	A			H	H			
82	pF		S		P	P		A	A			H	H			
100	pF		S		P	P		A	A			H	H			
120	pF		S		P	P		A	A			H	H			
150	pF		S		P	P		A	A			H	H			
180	pF		S		P	P		A	A			H	H			
220	pF		S		P	P		A	A			H	H			
270	pF		S		P	P		A	A			H	H			
330	pF	S	S		P	P		A	A			H	H			
390	pF	S	S		P	P		A	A			H	H			
470	pF	S	S		P	P		A	A			H	H			
560	pF	S			P	P		A	A			H	H			
680	pF	S			P			A	A			H	H			
820	pF	S			P			A	A			H	H			
1.0	nF	S			P			H	A			H	H			
1.2	nF				P			H	H			H	H			X
1.5	nF				P			H	H			H	H			X
1.8	nF				P			H	H			H	H			X
2.2	nF				P			H	H			H	H			X
2.7	nF				P			X	X			H	H			X
3.3	nF				P			X	X			H	H			X
3.9	nF			P			A	X	X			H	H			X
4.7	nF			P			A	X				H	H			X
5.6	nF			P			A	X				H	H			X
6.8	nF			P			A	X				C	C			X
8.2	nF			P			A	X		H	X	X		C		X
10	nF			P			A	X		H	X		X	C	X	X
15	nF						H			H	X		X	X	X	X
22	nF						X			H	X		X		X	X
33	nF						X			X	L		X		X	X
47	nF									X		Z			L	
68	nF									L		Z			L	
100	nF											G			Z	
220	nF														U	

CODIGO

C1206-XX-NP0

DESCRIPCION

Capacitor ceramico SMD NP0 50V

Size And Values Available (NPO) 250v~3000v

Size	0805		1206				1210					1808					1812					
(L)	2.00±0.20		3.20±0.20				3.20±0.30					4.50±0.30					4.50±0.30					
(W)	1.25±0.20		1.60±0.20				2.50±0.20					2.00±0.20					3.20±0.30					
(T)	0.80±0.10		1.65±0.20				1.65±0.20					2.00±0.20					2.00±0.20					
(t)	0.30~0.70		0.30~0.70				0.30~0.70					0.35~1.00					0.35~1.00					
Cap./ W.V.	250	500	250	500	1KV	2KV	250	500	1KV	2KV	3KV	250	500	1KV	2KV	3KV	250	500	1KV	2KV	3KV	
10	pF	A	A	H	H	L	L			L	L	L			F	F	F			L	L	L
12	pF	A	A	H	H	L	L			L	L	L			F	F	F			L	L	L
15	pF	A	A	H	H	L	L			L	L	L			F	F	F			L	L	L
18	pF	A	A	H	H	L	L			L	L	L			F	F	F			L	L	L
22	pF	A	A	H	H	L	L			L	L	L			F	F	F			L	L	L
27	pF	A	A	H	H	L	L			L	L	L			F	F	F			L	L	L
33	pF	A	A	H	H	L	L			L	L	L			F	F	F			L	L	L
39	pF	A	A	H	H	L	L			L	L	L			F	F	F			L	L	L
47	pF	A	A	H	H	L	L			L	L	L			F	F	F			L	L	L
56	pF	A	A	H	H	L	L			L	L	L			F	F	F			L	L	L
68	pF	A	A	H	H	L	L			L	L	L			F	F	F			L	L	L
82	pF	A	H	H	H	L	L			L	L	L			F	F	F			L	L	L
100	pF	H	H	H	H	L	L			L	L	L			F	F	F			L	L	L
120	pF	H	X	H	H	L	L			L	L	L			F	F	F			L	L	L
150	pF	X	X	H	H	L	L			L	L	L			F	F	F			L	L	L
180	pF	X	X	H	H	L	L			L	L	L			F	F	F			L	L	L
220	pF	X	X	H	H	L	L			L	L	L			L	L	L			L	L	L
270	pF	X	X	C	C	L	L			L	L	L			L	L	L			L	L	L
330	pF	X	X	C	C	L	L			L	L	L			L	L	L			L	L	L
390	pF	X	X	C	C	L	L			L	L	L			Z	Z				L	L	Z
470	pF			C	C	L	L			L	L	L			Z	Z				L	L	
560	pF			X	X	L	L			L	L	L			Z	Z				L	L	
680	pF			X	X	L	L			L	L	L			Z					L	L	
820	pF			L	L	L	L			L	L	L			Z					L	L	
1000	pF			L	L	L	L	X	X	L	L	L			Z			X	X	L	L	
1200	pF							X	X						Z			X	X	L	L	
1500	pF							X	X									X	X	L	L	
1800	pF							X	X									X	X	L	L	
2200	pF							X										X	X	L	L	
2700	pF							X										X	X	L	L	
3300	pF																	X	X			
3900	pF																					
4700	pF																					
5600	pF																					
6800	pF																					
8200	pF																					