

MH481, a linear Hall-effect sensor, is composed of hall sensor, linear amplifier and emitter-follower output stage. The integrated circuitry features low noise output, which makes it unnecessary to use external filtering. It also includes thin film resistors to provide increased temperature stability and accuracy. These linear Hall sensors have an operating Temperature range of -40°C to 100°C , appropriate for commercial, consumer, and industrial environments.

The high sensitivity of Hall Effect sensor accurately tracks extremely small changes in magnetic flux density. The linear sourcing output voltage is set by the supply voltage and varies in proportion to the strength of the magnetic field. Typical operation current is 2.9mA and operating voltage range is 3.0 volts to 6.5 volts.

MH481 is rated for operation between the ambient temperatures -40°C and 100°C for the E temperature range. The package style available provides magnetically optimized solutions for most applications. Package UA is a three-lead ultramini SIP for through-hole mounting.

RoHS and Pb free/Green package has been qualified by third party lab.


Features and Benefits

- Operating Voltage Range: 3.0V~6.5V
- Power consumption of 2.9 mA at 5 Vdc for energy efficiency
- Low-Noise Operation
- Single current sourcing output
- Linear output for circuit design flexibility
- Thin film resistors for a stable and accurate output
- Responds to either positive or negative gauss
- Small Size
- Magnetically Optimized Package
- Cost competitive
- Robust ESD performance

Applications

- Current sensing
- Motor control
- Position sensing
- Magnetic code reading
- Rotary encoder
- Ferrous metal detector
- Vibration sensing
- Liquid level sensing
- Weight sensing


Ordering Information

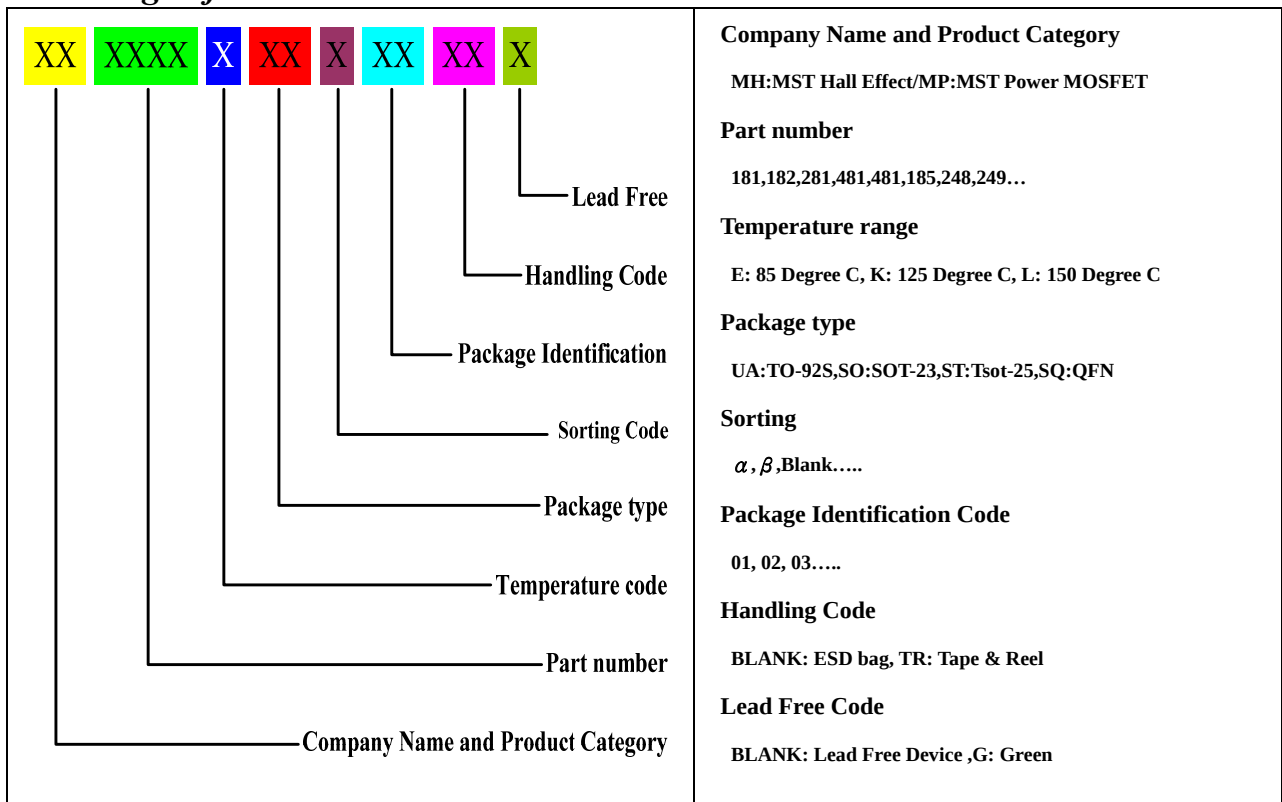


Part No.	Temperature Suffix	Package Code	Sorting Code	Package Code
481	E (-40°C to +100°C)	UA (TO-92S)		02
481	E (-40°C to +100°C)	UA (TO-92S)	α	02
481	E (-40°C to +100°C)	UA (TO-92S)	β	02

Function Block Diagram

Block Diagram Current Sourcing Output

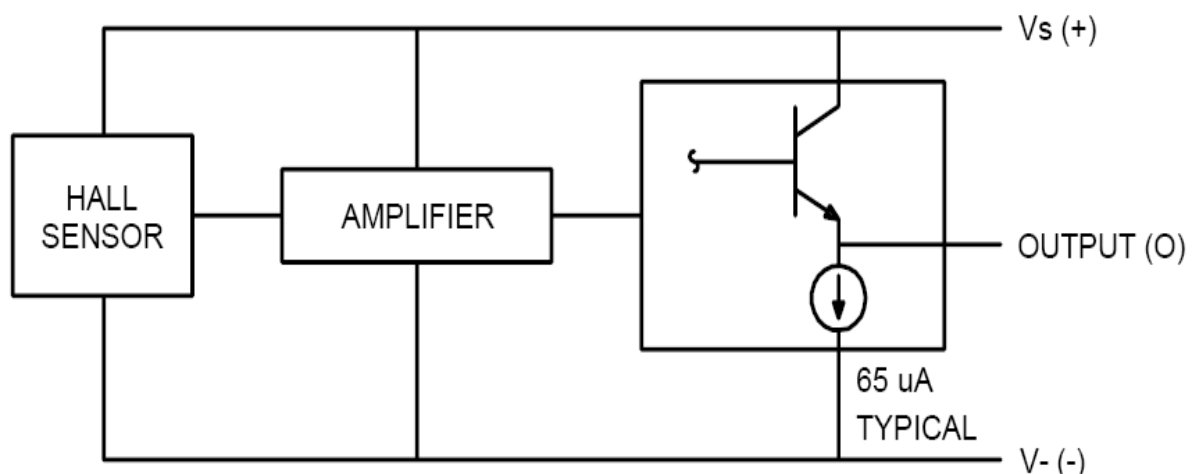

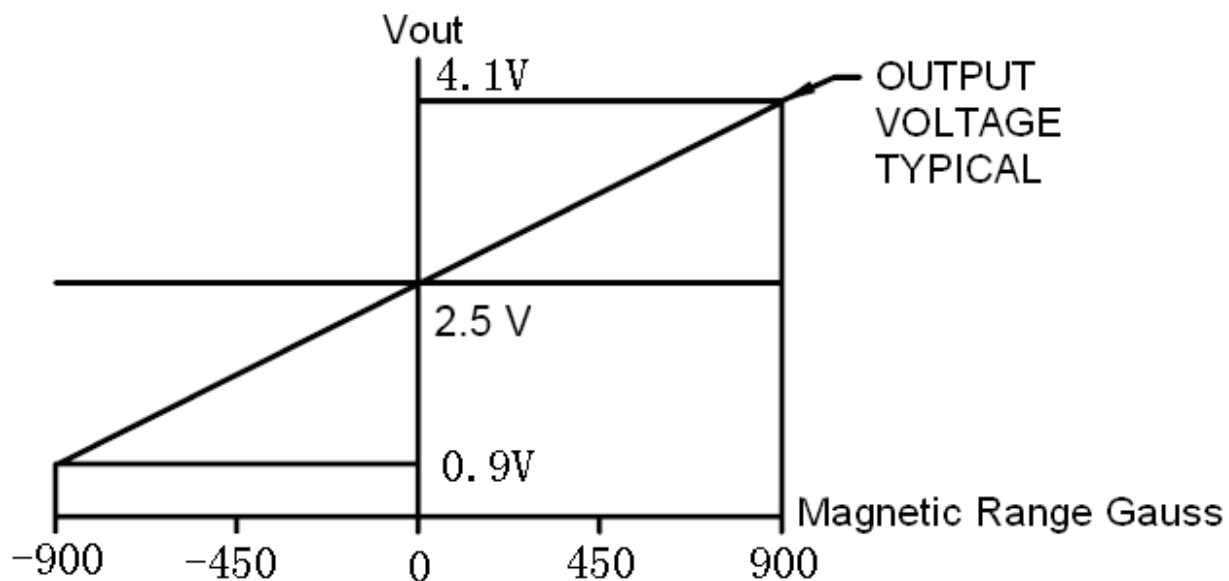Transfer Characteristics ($V_s=5.0\text{VDC}$)

Absolute Maximum Ratings

Supply Voltage, V_{cc}	-0.5Vdc to 8Vdc
Output Current, I_{out}	10mA
Operating Temperature Range, T_A "E" version	-40°C to 100°C
Storage Temperature, T_s	-65°C to 170°C
Magnetic Flux Density	No limit

MH 481EUA Electrical Specifications

DC Operating Parameters $T_A=+25^\circ\text{C}$, $V_{DD}=5\text{V}$ (Unless otherwise specified)

Parameters	Test Conditions	Min	Typ	Max	Units
Operating voltage		3.5		6.5	V
Supply current			4	8	mA
Output Current	Min($V_s>3\text{V}$), Typ($V_s>3\text{V}$)	1.0	1.5		mA
Output Voltage	Null @ 0 G	2.3	2.5	2.7	V
Output Bandwidth			20		kHz
Output Voltage Span		0.95	1.05		V
Magnetic Range Gauss		+500	+800		G
Linearity	% of Span		-0.7		
Output type	Linear, Sourcing				
Magnetics type	Analog				
Response Time			3		μS
Sensitivity		1.5		2.3	mV/G

MH 481EUA- α Electrical Specifications

DC Operating Parameters $T_A=+25^{\circ}\text{C}$, $V_{DD}=5\text{V}$ (Unless otherwise specified)





Parameters	Test Conditions	Min	Typ	Max	Units
Operating voltage		3.5		6.5	V
Supply current			4	8	mA
Output Current	Min($V_s > 3\text{V}$), Typ($V_s > 3\text{V}$)	1.0	1.5		mA
Output Voltage	Null @ 0 G	2.3	2.5	2.7	V
Output Bandwidth			20		kHz
Output Voltage Span		0.95	1.05		V
Magnetic Range Gauss		+500	+800		G
Linearity	% of Span		-0.7		
Output type	Linear, Sourcing				
Magnetics type	Analog				
Response Time			3		μS
Sensitivity		1.5		1.9	mV/G



MH 481EUA- β Electrical Specifications

DC Operating Parameters $T_A=+25^{\circ}\text{C}$, $V_{DD}=5\text{V}$ (Unless otherwise specified)

Parameters	Test Conditions	Min	Typ	Max	Units
Operating voltage		3.5		6.5	V
Supply current			4	8	mA
Output Current	Min($V_s > 3\text{V}$), Typ($V_s > 3\text{V}$)	1.0	1.5		mA
Output Voltage	Null @ 0 G	2.3	2.5	2.7	V
Output Bandwidth			20		kHz
Output Voltage Span		0.95	1.05		V
Magnetic Range Gauss		+500	+800		G
Linearity	% of Span		-0.7		
Output type	Linear, Sourcing				
Magnetics type	Analog				
Response Time			3		μS
Sensitivity		1.9		2.3	mV/G


Performance Graphs

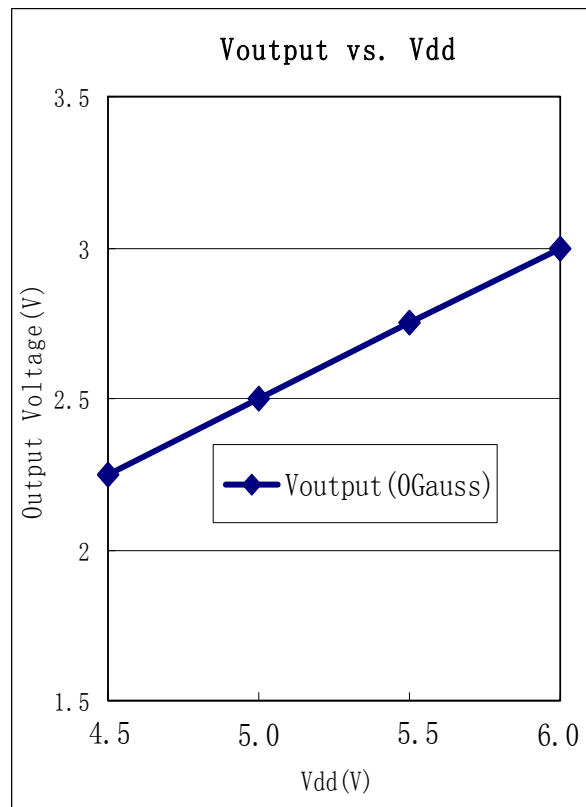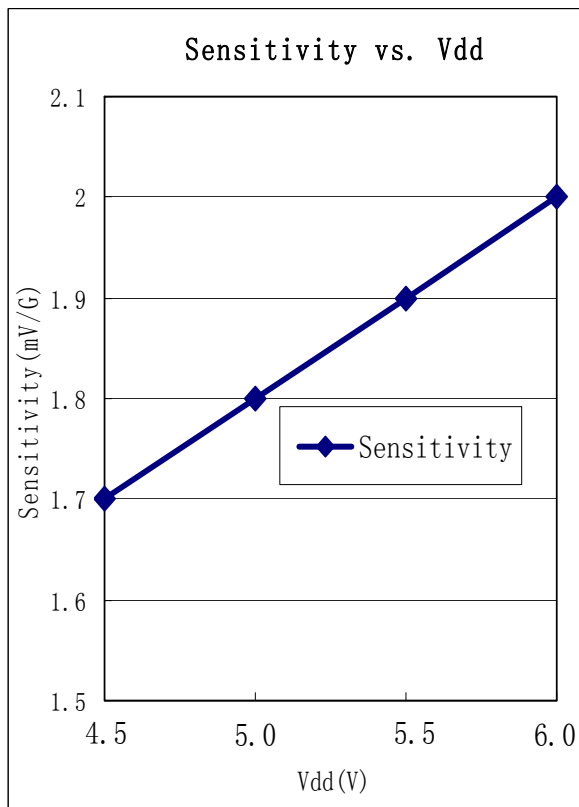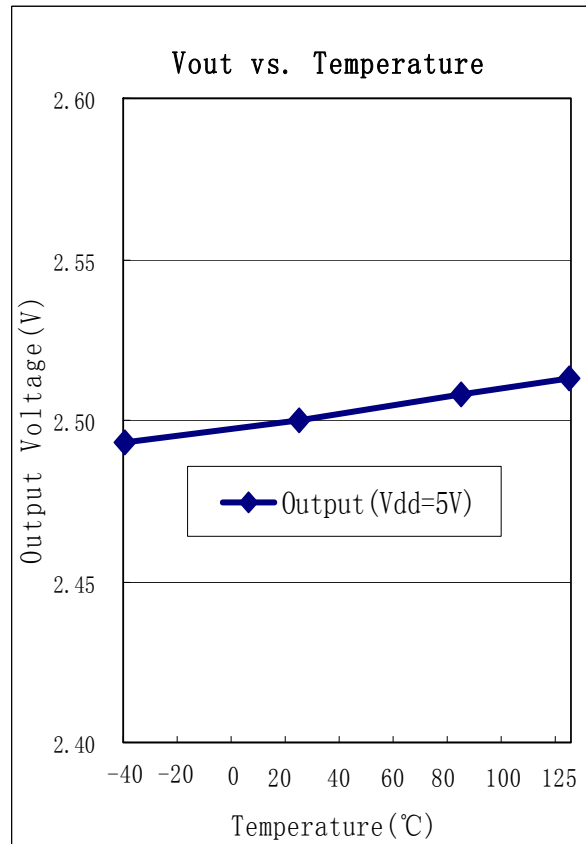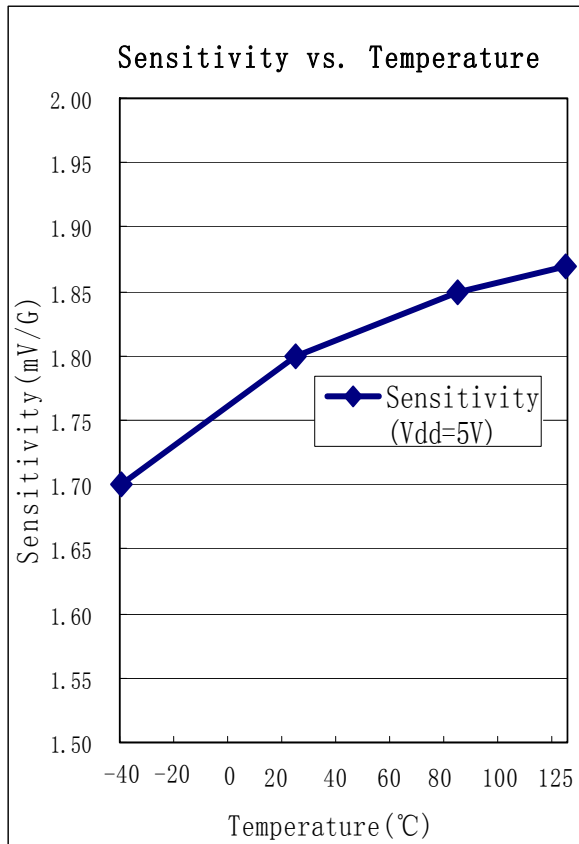

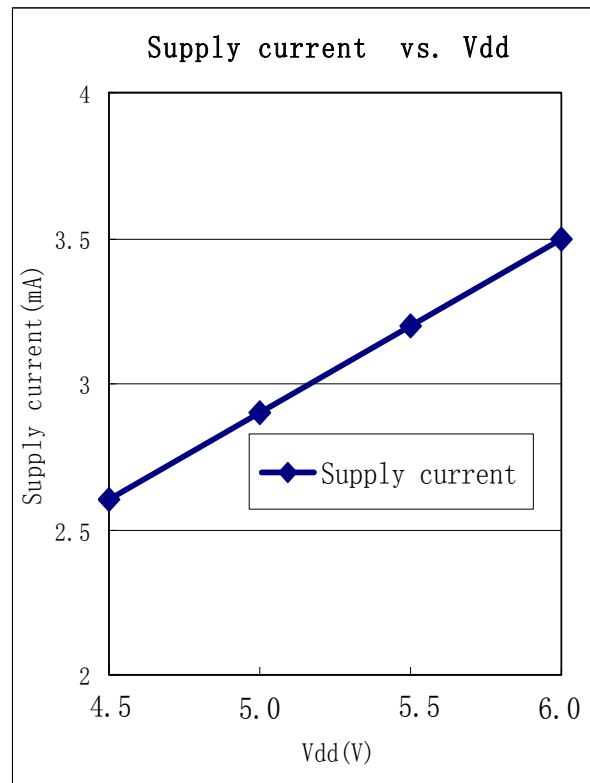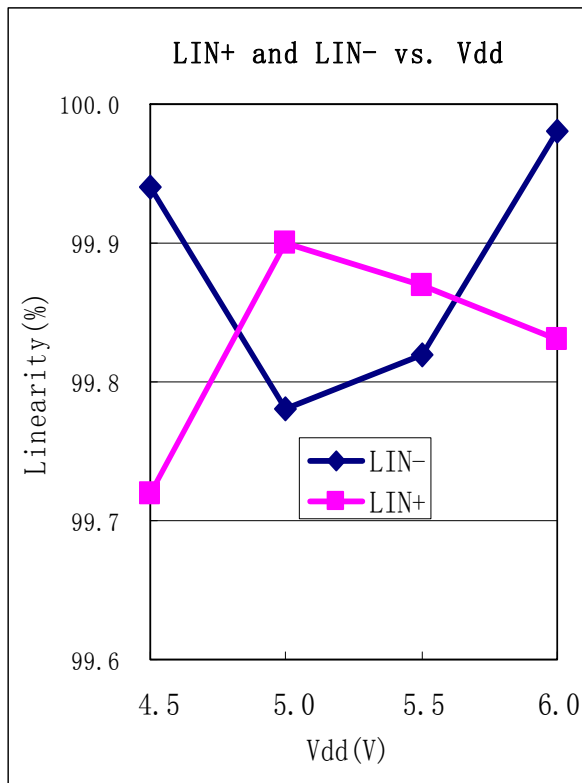

Sensor Location, package dimension and marking

MH 481EUA-02 Package

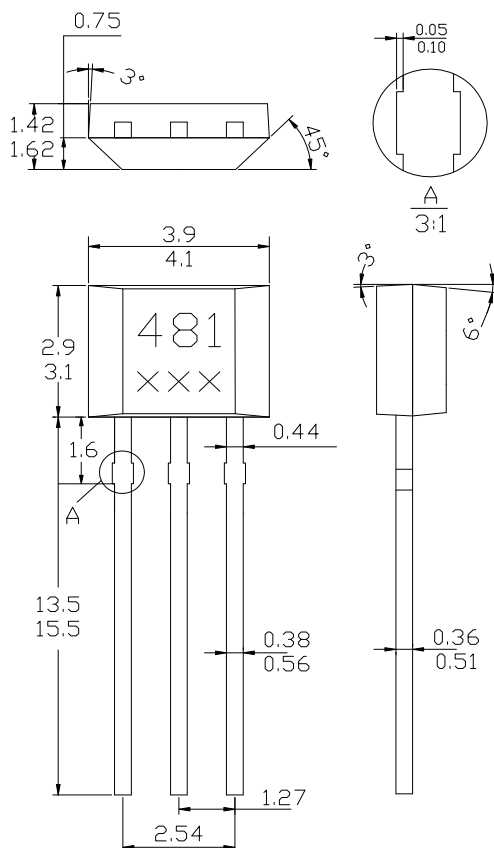


NOTES:


- 1).Controlling dimension: mm
- 2).Leads must be free of flash and plating voids
- 3).Do not bends leads within 1 mm of lead to package interface

4).PINOUT:

Pin 1	VDD
Pin 2	GND
Pin 3	Output

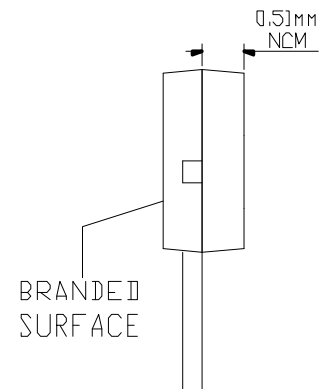


Active Area Depth

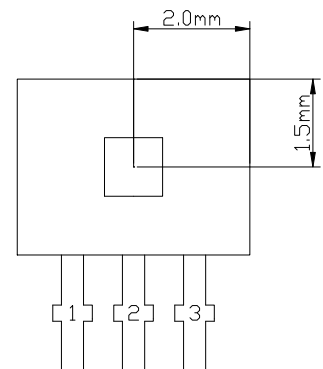

Sensor Location

IR reflow curve

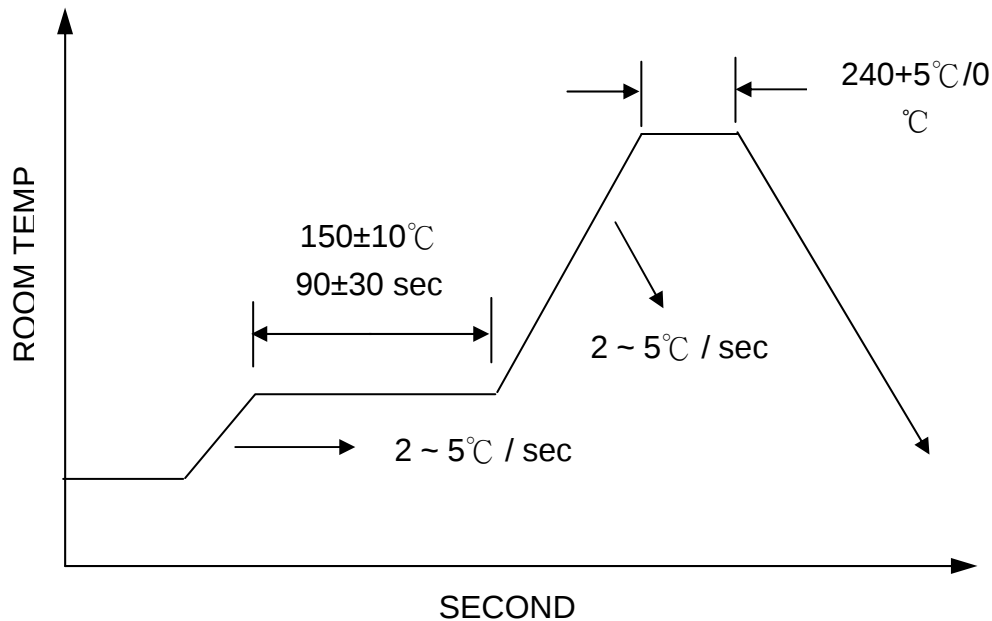

UA Soldering Condition

Packing specification:

Package	per Reel/Bag	per inner box	per carton
TO-92S-3L	1,000pcs/bag	10bag /box	8 box/carton

Inner box label:

Bag and inner box PB free Label



P/N:
Sorting:
Pkg Idf:
Lot No:
Date Code:
Quantity:

Bag and inner box Green Label



P/N:
Sorting:
Pkg Idf:
Lot No:
Date Code:
Quantity:

Size: 3.4cm*6.4cm