

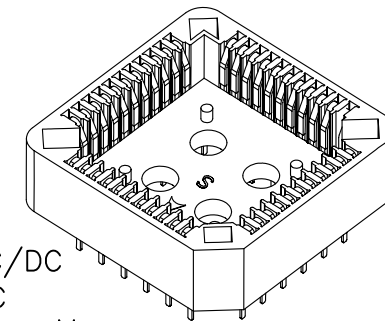


P.C.B. Layout

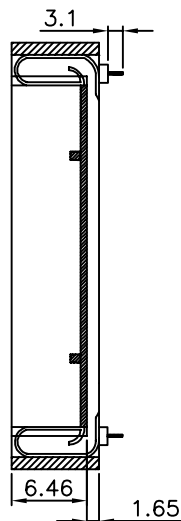

Specifications:

- Current rating: 1.0 Amp AC/DC
- Voltage rating: 250V AC/DC
- Contact resistance: 15m ohm Max
- Insulation resistance: 10,000M ohm Min
- Withstanding voltage: 600V AC/Minute
- Operating Temperature range: -40°C ~ +105°C
- Material and Finish:
 - Insulator: High Temperature Plastic (UL-94v-0)
 - Standard Color: Black
 - Contact Material: Phosphor Bronze
 - Plating: Tin Plated

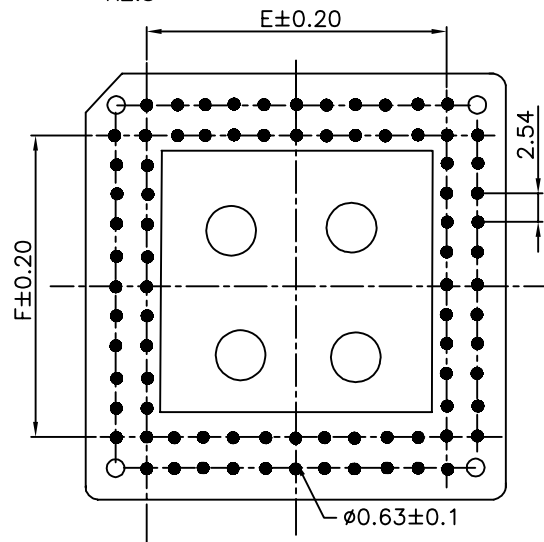

Positions	A	B	C	D	E	F
20	15.50	15.50	5.08	5.08	5.08	5.08
28	18.04	18.04	7.62	7.62	7.62	7.62
32	18.04	20.60	7.62	10.16	7.62	10.16
44	23.48	23.48	12.70	12.70	12.70	12.70
52	25.88	25.88	15.24	15.24	15.24	15.24
68	31.66	31.66	20.32	20.32	20.32	20.32
84	36.66	36.66	25.40	25.40	25.40	25.40

GENERAL TOLERANCE:

.X = ±0.2
.XX = ±0.15

UNIT: MM	DESCRIPTION: PLCC Socket Dip Type	SIZE A4
SCALE:		
SHEET: 1 / 1	PART NO:	
PROJECTION:		

DESCRIPTION: PLCC Socket Dip Type	SIZE A4
PART NO:	